


Product Info

LG OLED

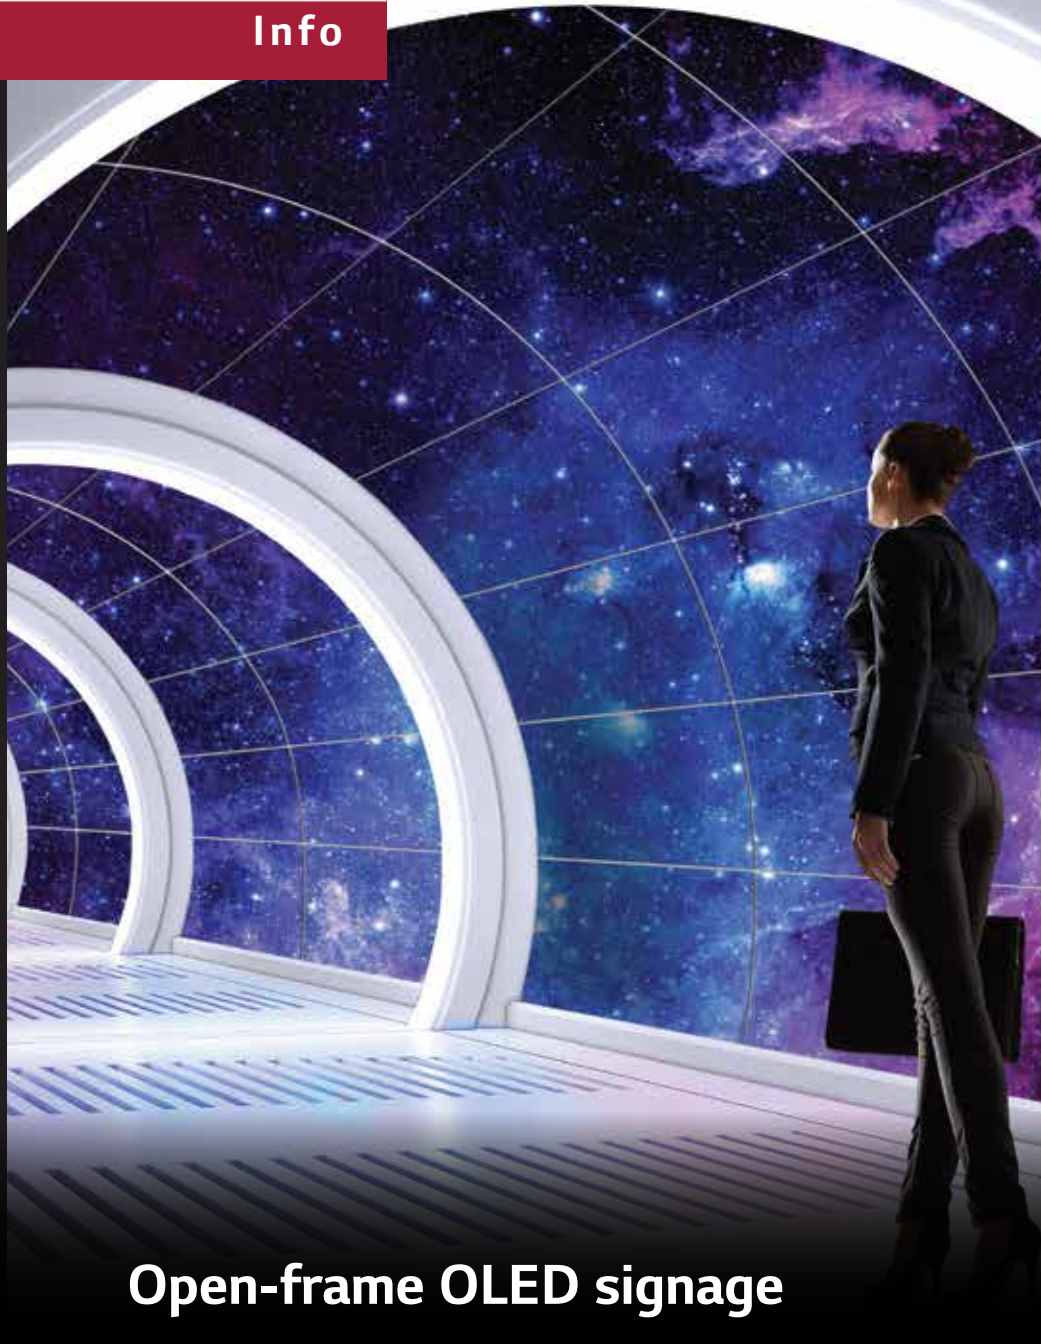

Open-frame OLED signage

SPECIFICATIONS

		55EF5C
PANEL	Screen Size	55"
	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Viewing Angle (H x V)	178 x 178
	Operation Hours	18 hrs/7 days (Moving video only)
	Orientation	Portrait & Landscape
CONNECTIVITY	Input	HDMI, DP
	Output	DP, Audio
	External Control	RS232C in/out, RJ45 in, IR receiver, LAN out, IR out, USB
Bezel Color		Black
Bezel Width		7.2, 7.2, 7.2, 7.2 mm (U, B, L, R *Off-bezel)
PHYSICAL SPECIFICATION	Dimension (W x H x D)	Head
		1. Landscape (W x H)
		- 1,950R, In-curve: TBD
		- 2,000R, Concave: 1,213.7 x 704.1 mm
		- 2,000R, Convex: 1,214.2 x 704.1 mm
		- 3,000R, In-curve: TBD
		- 4,000R, Out-curve: TBD
		- 4,500R, Out-curve: TBD
		- 5,000R, In-curve: 1,227.5 x 704.1 mm
		- 5,000R, Out-curve: TBD
- 8,000R, In-curve: 1,228.8 x 704.1 mm		
2. Portrait (W x H)		
- 1,500R, Concave: 1,229 x 700.7 mm		
- 1,500R, Convex: 1,229 x 701.2 mm		
3. Landscape/Portrait (D) - not affected by orientation/curvature		
- Module Only: 21.4 mm (Incl. case top)		
- Module + Center Bar: 30 mm		
- Module + Center Bar + T-Con Box: 41.2 mm		
- Module + Center Bar + T-Con Box + Signage Box: 91.2 mm		
T-Con Box	312.2 x 213.4 x 16 mm	
Signage Box	412.6 x 222.4 x 64.3 mm	
Weight	Head: 11 kg, T-CON Box: 1.5 kg, Signage Box: 4.6 kg	
SPECIAL FEATURES		Temperature Sensor, Tile mode, Cooling FAN, DPM Select, Energy Saving, Motion Eyecare, File Play with USB, PIP/PBP, Internal Memory (64 GB), USB Cloning, DP Daisy Chain, Wake on LAN, PM Mode, Contents Scheduling, Local Time Auto Setting, Failover
ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C
	Operation Humidity	10% to 80%
STANDARD (CERTIFICATION)	Safety	UL/cUL/CB/TUV/KC
	EMC	FCC Class "A"/CE/KCC
	ErP/Energy Star	Yes/NA
MEDIA PLAYER COMPATIBILITY	OPS-Type Compatible	Yes
COMPATIBILITY	External Media Player Attachable	Yes
SOFTWARE COMPATIBILITY	SuperSign OLED	Yes
	SuperSign C	Yes
ACCESSORIES	Basic	Remote Controller (including battery 2 ea), Power Cord, QSG, Mini HDMI Cable (3M x 2 ea, for connection between head and signage box), Power Harness Cable (3M x 2 ea, for connection between head and signage box), Regulation Book, Phone to RS232C Gender, Jack Cover, Signage Box Mounting Bracket
	Optional	OPS Kit (KT-OPSA), Fixed Ceiling Mount Kit (ACC-CF-EH5C), Rotational Ceiling Mount Kit (ACC-CR-EH5C), Wall Mount Kit (ACC-W-EH5C), Stand Kit 1 (ACC-S-EH5C), Stand Kit 2 (ACC-S1-EH5C), Signage Box Cover (ACC-C-EH5C)

Product Info



LG 86" Ultra Stretch

SPECIFICATIONS

		86BH5C-BF
PANEL	Screen Size	86"
	Panel Technology	IPS
	Aspect Ratio	58:9
	Native Resolution	3,840 x 600 (UHD)
	Brightness	Typ: 500cd/m ² , Min : 400cd/m ²
	Contrast Ratio	1,100:1(Typ)
	Dynamic CR	500,000:1 (Typ) : TBD
	Viewing Angle(H x V)	178 x 178
	Response Time	8ms (G to G BW) typ.
	Surface Treatment	AGP (10% Haze)
CONNECTIVITY	Life time	50,000 Hrs
	Orientation	Landscape / Portrait
	Input	HDMI, DP, OPS, DVI-D, USB2.0, USB3.0, SD Card
CONNECTIVITY	Output	Analog Audio
	External Control	RS232C, RJ45, IR+B Receiver, Pixel Sensor, Analog Audio
	Bezel Color	Black
PHYSICAL SPECIFICATION	Bezel Width	4.4mm (L/R), 5.9mm (T/B)
	Monitor Dimension (W x H x D)	2,158.3 x 348.5 x 81.7mm
	Weight (Head)	20.5kg
	Carton Dimensions (W x H x D)	2,290 x 228 x 479
	Packed Weight	35.4kg
VESA Standard Mount Interface		200 x 600mm
SPECIAL FEATURES		Temperature Sensor, Auto Brightness Sensor, Tile Mode, Natural Mode@Tile Mode, ISM Method, Energy Saving, Smart Energy Saving, File Play with USB/SD/Internal Memory, PIP/PBP, 8GB (System 4GB + Available 4GB), Wi-Fi Dongle Ready, 4K Up Scaling
ENVIRONMENT CONDITIONS	Operation Temperature Range	0 °C to 40 °C
	Operation Humidity Range	10 % to 80 %
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KC
MEDIA PLAYER COMPATIBILITY	ErP / Energy Star	NA / NA
	OPS type compatible	Yes
SOFTWARE COMPATIBILITY	External Media player Attachable	No
	SuperSign W/Lite	Yes
ACCESSORY	SuperSign C	Yes
	Basic	Remote Controller (2ea Batteries included), Power Cord, DP (3M), RS-232C Cable (3M) Owner's Manual (Website upload)
ACCESSORY	Optional	AN-WF500 (WiFi USB Dongle), MP700, KT-OPSA (OPS KIT), KT-SPO (RGB Sensor) ** Stand is not available

Product Info



LG 88" Ultra Stretch

SPECIFICATIONS

		88BH7D
PANEL	Screen Size	88"
	Resolution	3840 * 1080 (Ultra HD)
	Active Area	2148 * 598 mm
	Aspect Ratio	32:9
	Brightness	700 nit
	Pol Type	Anti Flare Low reflection (Haze 3%)
	Installation Type	Portrait / Landscape
PHYSICAL SPECIFICATION	Bezel	4.4mm (L/R) 5.9mm (T/B)
	Thickness	85mm
	VESA	600x400
	PLATFORM	Hardware OS
CONNECTIVITY	* Contents: HDMI, USB, DP In/Out, DVI, SD Card *Others: RJ45 In/Out, RS232C In/Out, IR In, Audio In/Out	